


COUPLINGS

PAM HP Grip Inox W5

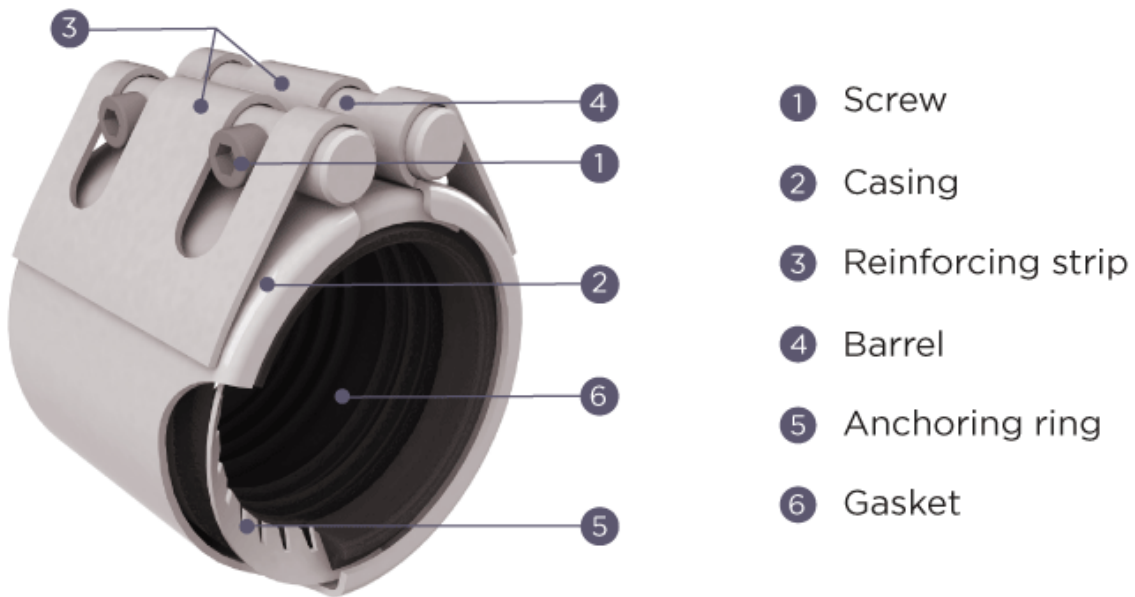

DESCRIPTION

Connection between pipe ends and/or fittings and accessories from Pam Building, PAM HP GRIP INOX (W5) couplings are used in sections where end thrust efforts have to be addressed.

The autogrip couplings with built-in claw rings are alternative solutions for securing junctions whilst addressing pressure. INOX (W5) couplings are recommended for networks where external stresses are high due to climate exposure such as pollution, condensation, or saline mist. EPDM gasket is suitable for most types of effluents, while NBR gasket is recommended for wastewater and runoff water liable to contain hot oil, solvents or hydrocarbons.

STANDARDS & APPROVALS


→ Industry Product Standards:
 EN 877
 CE
 EN 681-1

MATERIAL

1. Screw: stainless steel 1.4404 / AISI 316L
2. Casing: stainless steel 1.4404 / AISI 316L
3. Reinforcing strip: stainless steel 1.4404 / AISI 316L
4. Barrel: stainless steel 1.4401 / AISI 316
5. Anchoring ring: stainless steel 1.4310 / AISI 301
6. Gasket: EPDM or NBR

COUPLINGS

PAM HP Grip Inox W5

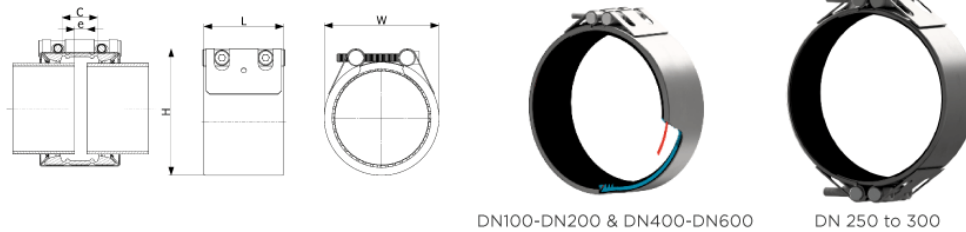

DN	L	H	W	c	e	Screw Number	Torque (Nm)	Hydrostatics pressure (bar)*	End-thrust pressure resistance (bar)	Max angular deflection **	Weight	Gasket	Product Code
100	89	156	139	16	8	2	25 N*m		10	3°	1.4	EPDM	278496
100	89	156	139	16	8	2	25 N*m	10	10	3°	1.4	NBR	278505
125	114	192	166	24	8	2	60 N*m		10	3°	2.6	EPDM	278497
125	114	192	166	24	8	2	60 N*m	10	10	3°	2.6	NBR	278506
150	114	218	191	24	8	2	85 N*m	10	10	3°	3.2	EPDM	278498
150	114	218	191	24	8	2	85 N*m	10	10	3°	3.2	NBR	278507
200	114	269	241	24	8	2	60 N*m		10	3°	5	EPDM	278499
200	114	269	241	24	8	2	60 N*m	10	10	3°	5	NBR	278508
250	114	357	304	24	8	4	80 N*m		10	1°45'	8.6	EPDM	278500
250	114	357	304	24	8	4	80 N*m	10	10	1°45'	8.6	NBR	278509
300	114	410	357	24	8	4	80 N*m		10	1°45'	10	EPDM	278501
300	114	410	357	24	8	4	80 N*m	10	10	1°45'	10	NBR	278510

All dimensions are in mm and nominal weights are in kg.

Maximum angular deflection: possible angular deviation between the axes of two elements to be connected, according to EN 877.

Caution:

- The assembly must be carried out without lubricating paste or grease.
- Respect the 5mm distance between the ends of the pipes.
- Use of grip collars is not possible. If it is necessary to «block» the pipe in order to, for example, take over background effects, please consult us.

This document is provided for information purposes only and our company reserves the right to modify the information contained herein at any time. Our company declines 20 all responsibility in the event of the use or installation of materials that do not comply with the rules prescribed in this document as well as with the standards, the technical documents and the applicable professional standards. Any orders placed will be subject to our General Terms and Conditions of Sale, available on request. The drawings and/ or images are the exclusive property of Pam Building and are confidential. They must not be reproduced or disclosed to any third party without written consent. They may only be used for the purpose for which they were issued and are returnable on request.

Pam Building

130 Impasse du Chêne • 54700 BOUXIÈRES-SOUS-FROIDMONT • France • Tel: +33 (0) 9 78 45 50 54 • Email: tc@pambuilding.com • www.pambuilding.com
Simplified joint-stock company with a capital of 6,812,970.75€ • SIREN 799 283 882 • RCS NANCY