Dam building

ITINERO Blank end

DESCRIPTION

Part of the range dedicated to infrastructure, the ITINERO blank ends enable you to cap the ends of pipes or fittings. Designed for surface water from bridges and tunnels, the cast iron fittings are coated with a thick grey powder epoxy layer and are indefinitely recyclable.

RECOMMENDED USE

- Aggressive outdoor environment
- Buried networks
- Hydrocarbon Wastewater
- Runoff water

Material & Coatings

- Cast Iron
- \bullet Coating: mat grey RAL 7030, epoxy, average dry film thickness 300 $\mu m.$

TECHNICAL FEATURES

- Hot water resistance: 24h at 95°C.
- Thermal cycle resistance: 1500 cycles between 15°C and 93°C.
- Chemical resistance for $2 \le pH \le 12$.
- Salt spray resistance: more than 4500 h.

STANDARDS & APPROVALS


- Industry Product Standards:
 NF EN877
- Acoustic Performance: Lsc \leq 10 dB(A) & LaA = 47 dB(A) according to EN 14366 with 2L/s.
- Range fire classification: A2-s1,d0

ENVIRONMENTAL DATA

- Percentage of Recycled Content: 99 %
- Recycling Information: Cast iron is 100% recyclable through the existing recycling industrial network. Data source: Declaration of recycled content.



ITINERO Blank end

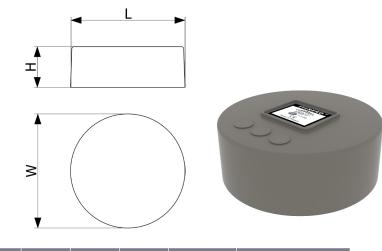

Weight	Product Code
0.8	277819
1.2	277825
1.7	277901
3.2	277902
5.9	277903
10	277904
21	277895
	0.8 1.2 1.7 3.2 5.9 10

All dimensions are in mm and nominal weights are in kg

Saint-Gobain PAM Bâtiment