

PAM-GLOBAL S

Short Single Branch 88°



DESCRIPTION

Part of the standard range, the PAM GLOBAL S single branche allows the junction between two pipe runs at a 88° angle for conveying fluid waste or rainwater. The cast iron fittings are coated with a reddish-brown epoxy film applied by cataphoresis and are fully and indefinitely recyclable.

RECOMMENDED USE

- Rainwater
- Valve water
- Wastewater

STANDARDS & APPROVALS

- Industry Product Standards:
 - DIN EN 877
- Acoustic Performance: $L_{sc} \leq 10$ dB(A) & $LaA = 47$ dB(A) according to EN 14366 with 2L/s.
- Range fire classification: A1

Material & Coatings

- Cast Iron
- Coating: red-brown, anti-corrosive cataphoresis epoxy, average dry film thickness 70 μ m.

TECHNICAL FEATURES

- Hot water resistance: 24h at 95°C.
- Thermal cycle resistance: 1500 cycles between 15°C and 93°C.
- Chemical resistance for $2 \leq pH \leq 12$.
- Salt spray resistance internal coating: more than 350 h.


ENVIRONMENTAL DATA

- Percentage of Recycled Content: 99 %
- Recycling Information: Cast iron is 100% recyclable through the existing recycling industrial network. Data source: Environmental Product Declaration S-P-02013



PAM-GLOBAL S

Short Single Branch 88°

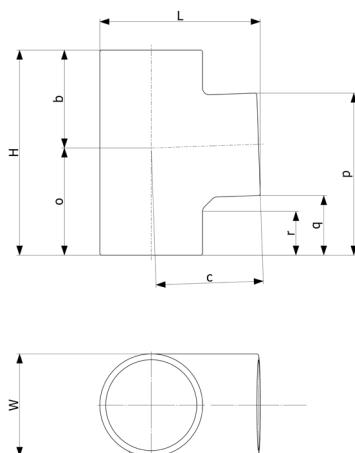

DN	dn	L	H	W	b	c	o	p	q	r	Weight	Product Code
50	50	110	145	58	66	80	79	111	53	31	1	155767
75	50	132	160	83	75	90	85	117	59	42	1.5	176718
75	75	138	180	83	85	95	95	140	57	37	1.6	176719
100	50	161	170	110	76	105	94	127	69	45	2	155827
100	75	166	190	110	90	110	100	145	62	40	2.4	176720
100	100	172	220	110	105	115	115	174	64	41	2.8	155855
125	50	188	180	135	82	120	98	131	73	51	2.6	155876
125	75	194	205	135	100	125	105	151	68	48	2.9	176722
125	100	199	235	135	110	130	125	184	74	48	4.2	155880
125	125	205	260	135	123	135	137	209	74	48	5	155894
150	50	221	200	160	100	140	100	134	76	51	3.9	155908
150	75	221	220	160	105	140	115	161	78	55	4.4	176723
150	100	227	245	160	115	145	130	190	80	52	5.6	155911
150	125	232	275	160	128	150	147	220	85	56	6.1	155913
150	150	237	300	160	142	155	158	243	83	55	6.7	155925
200	100	282	270	210	125	175	145	206	96	64	8.8	156980
200	200	388	365	210	172	183	193	296	86	67	11	157024
250	250	366	455	274	228	243	240	375	101	77	19.5	157102
300	300	434	530	326	265	265	265	437	111	87	35	157165
400	400	616	684	429	314	370	370	595	165	90	67	170732

All dimensions are in mm and nominal weights are in kg

This document is provided for information purposes only and our company reserves the right to modify the information contained herein at any time. Our company declines all responsibility in the event of the use or installation of materials that do not comply with the rules prescribed in this document as well as with the standards, the technical documents and the applicable professional standards. Any orders placed will be subject to our General Terms and Conditions of Sale, available on request. The drawings and/or images are the exclusive property of Saint-Gobain PAM and are confidential. They must not be reproduced or disclosed to any third party without written consent. They may only be used for the purpose for which they were issued and are returnable on request.

Saint-Gobain PAM Bâtiment

21 avenue Camille Cavalier - BP 129 • 54705 • PONT-À-MOUSSON • France • Tel: +33 (0) 383 807 808 • Email: tcbatiment.sgpam@saint-gobain.com • www.pambuilding.com
Société par action simplifiée au capital de 6 812 970,75€ • SIREN 799 283 882 • RCS NANCY