

COUPLINGS

PAM R («R» for repair)



DESCRIPTION

“R” for Repair: this coupling is particularly suited to repairs and retrofits. The full opening strap is particularly suited to renovation projects. It is installed in two separate parts as shown in the image (2).

STANDARDS & APPROVALS


- Industry Product Standards:
 - NF EN877
 - NF P41 220

MATERIAL

1. Screw: stainless steel A4-70, with anti-seizing coating.
2. Strap: austenitic stainless steel - 1.4404/1.4571 (AISI 316L/316Ti)
3. Barrels: austenitic stainless steel -1.4404/1.4571 (AISI 316L/316Ti)
4. Sealing gasket: EPDM

COUPLINGS

PAM R («R» for repair)

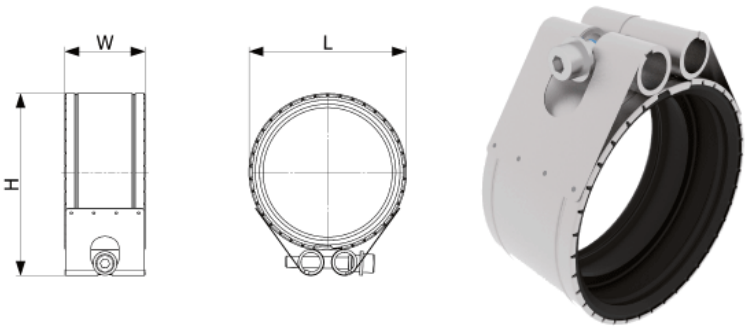

| DN | L | H | W | Weight | Product code |
|-----|-----|-----|----|--------|--------------|
| 50 | 67 | 86 | 50 | 0.18 | 233899 |
| 75 | 91 | 110 | 50 | 0.2 | 233900 |
| 100 | 118 | 137 | 58 | 0.29 | 233901 |
| 125 | 147 | 166 | 58 | 0.31 | 233902 |
| 150 | 167 | 186 | 58 | 0.36 | 233903 |
| 200 | 223 | 242 | 58 | 0.47 | 233904 |

All dimensions are in mm and nominal weights are in kg

This document is provided for information purposes only and our company reserves the right to modify the information contained herein at any time. Our company declines all responsibility in the event of the use or installation of materials that do not comply with the rules prescribed in this document as well as with the standards, the technical documents and the applicable professional standards. Any orders placed will be subject to our General Terms and Conditions of Sale, available on request. The drawings and/or images are the exclusive property of Saint-Gobain PAM and are confidential. They must not be reproduced or disclosed to any third party without written consent. They may only be used for the purpose for which they were issued and are returnable on request.

Saint-Gobain PAM Bâtiment