

# CONNECTORS

## Adapting joints

### DESCRIPTION


Part of the PAM Building cast iron connector offer, Adapting Joints (AJ) are used to connect pipe and fittings of different outside diameters. They are watertight, impermeable and are compatible for effluents with PH between 2 to 12. Accidental maximum pressure is 0,6 bar.

### RECOMMENDED USE

- Domestic use
- Gravitary

### STANDARDS & APPROVALS

- Industry Product Standards:
  - NF EN877

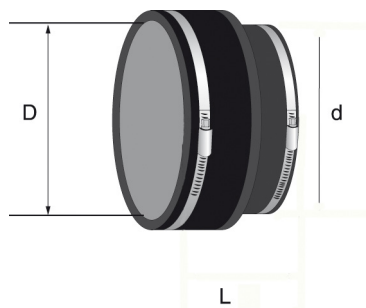

### MATERIAL


- Elastomer: EPDM ; Ring: Inox 304

### ENVIRONMENTAL DATA

- Recycling Information: Partially recyclable

# CONNECTORS

## Adapting joints

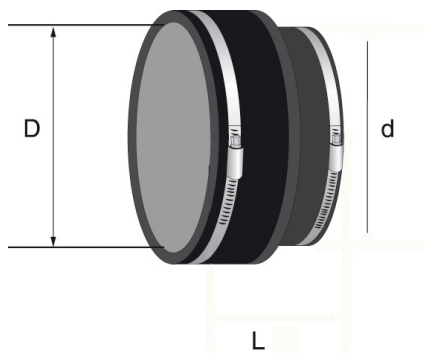

DN	D min.*	D max.*	d min.*	d max.*	L	Weight	Product code
150	155	170	130	145	120	0.8	155003
200	170	193	210	235	150	1.5	155004

All dimensions are in mm and nominal weights are in kg

\* minimum / maximum external diameter of the pipes to be connected

Please refer to the design and installation section of our catalogue, or to the dedicated page:

<https://www.pambuilding.com/connection-to-other-materials>

This document is provided for information purposes only and our company reserves the right to modify the information contained herein at any time. Our company declines all responsibility in the event of the use or installation of materials that do not comply with the rules prescribed in this document as well as with the standards, the technical documents and the applicable professional standards. Any orders placed will be subject to our General Terms and Conditions of Sale, available on request. The drawings and/or images are the exclusive property of Saint-Gobain PAM and are confidential. They must not be reproduced or disclosed to any third party without written consent. They may only be used for the purpose for which they were issued and are returnable on request.

### Saint-Gobain PAM Bâtiment

21 avenue Camille Cavalier - BP 129 • 54705 • PONT-À-MOUSSON • France • Tel: +33 (0) 383 807 808 • Email: tcbatiment.sgpam@saint-gobain.com • www.pambuilding.com  
Société par action simplifiée au capital de 6 812 970,75€ • SIREN 799 283 882 • RCS NANCY