SMU PLUS
Branch Trap DN200

DESCRIPTION

Part of the Specialized Plus range drainage system, designed for rainwater networks, the SMU Plus DN200 branch trap allows the conservation of a water trap preventing the rise of odours. Designed for intensive use, the cast iron access fittings are coated with a 300 µm grey powder epoxy coating and are indefinitely and fully recyclable.

Material & Coatings

- Cast Iron
- Coating: grey RAL 7015, epoxy, average dry film thickness 300 µm.

RECOMMENDED USE

- Aggressive effluents
- Fat Wastewater
- Industrial Wastewater
- Corrosive atmosphere
- Hot effluents

TECHNICAL FEATURES

- Hot water resistance: 24h at 95°C.
- Thermal cycle resistance: 1500 cycles between 15°C and 93°C.
- Chemical resistance for 1 ≤ pH ≤ 13, up to 80°C.
- Salt spray resistance: more than 2500h.

STANDARDS & APPROVALS

- Industry Product Standards:
  - NF EN877
- Acoustic Performance: Lsc ≤ 10 dB(A) & LaA = 47 dB(A) according to EN 14366 with 2L/s.
- Range fire classification: A2-s1,d0

ENVIRONMENTAL DATA

- Percentage of Recycled Content: 99 %
- Recycling Information: Cast iron is 100% recyclable through the existing recycling industrial network. Data source: Environmental Product Declaration S-P-02014

PAM SMU Plus
NF 1-3(6) EN877
BBA 00/3748
CE A2 - s1, d0
Made in France

PAM Building • Tel: +33 (0) 383 807 808 • Email: tcbatiment.sgpam@saint-gobain.com • www.pambuilding.com

SMU PLUS
Branch Trap DN200

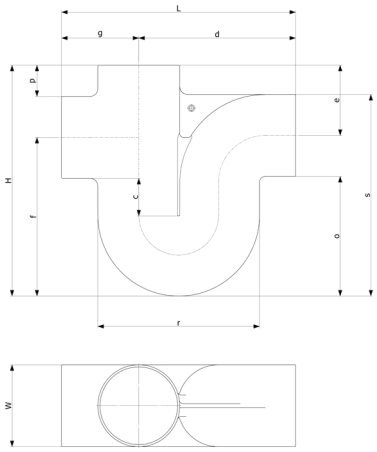

DN	L	H	W	c	d	e	f	g	o	p	r	s	Weight	Product Code
200	600	590	210	100	420	180	400	200	300	80	415	510	34.3	155464

All dimensions are in mm and nominal weights are in kg

This document is provided for information purposes only and our company reserves the right to modify the information contained herein at any time. Our company declines all responsibility in the event of the use or installation of materials that do not comply with the rules prescribed in this document as well as with the standards, the technical documents and the applicable professional standards. Any orders placed will be subject to our General Terms and Conditions of Sale, available on request. The drawings and/or images are the exclusive property of Saint-Gobain PAM and are confidential. They must not be reproduced or disclosed to any third party without written consent. They may only be used for the purpose for which they were issued and are returnable on request.

Saint-Gobain PAM Bâtiment

21 avenue Camille Cavalier - BP 129 • 54705 • PONT-À-MOUSSON • France • Tel: +33 (0) 383 807 808 • Email: tcbatiment.sgpam@saint-gobain.com • www.pambuilding.com
Société par action simplifiée au capital de 6 812 970,75€ • SIREN 799 283 882 • RCS NANCY